


REVISIONS		
REV	DESCRIPTION	APPROVED

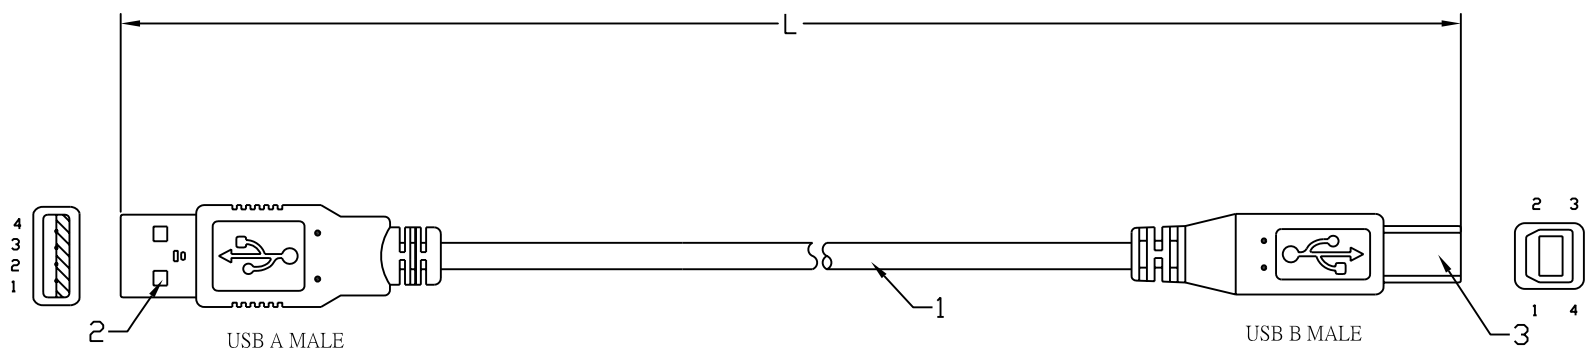


NOTES:

1.MOLDED CONNECTOR END REQUIREMENTS:  
A:PVC -45P PANTONE 426C

2.CABLE: [28AWG(7/0.127)\*1P+28AWG(7/0.127)\*2C  
+AL/MY+DW(7/0.127)+60%BD(16/5/0.1)JTIN  
INSULATION WIRE ONE: FO-SKIN, OD=0.80±0.05mm COLOR: WHITE&GREEN  
INSULATION WIRE TWO: SR-PVC, OD=0.80±0.05mm COLOR: BLACK,RED  
JACKET:80°C 80P PVC OD=4.20±0.15mm  
COLOR: Platinum Gray  
MARKING:2725 (UL# TBD) 9J AWM 80°C 30V VW-1  
USB 2.0 RoHS Compliant

3.FINISHED PRODUCTS LENGTH:  
620-03: LENGTH=915mm TOLERANCE: ±12.7mm  
620-06: LENGTH=1829mm TOLERANCE: ±25.4mm  
620-10: LENGTH=3048mm TOLERANCE: ±25.4mm  
620-15: LENGTH=4572mm TOLERANCE: ±50.8mm

PIN OUTS		
USB AM	WIRE COLOR	USB BM
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL		SHELL

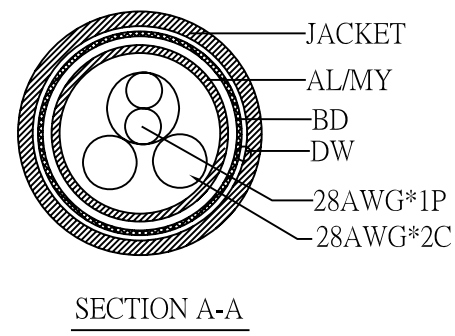

INSULATION: UPON 1M ohm AND 1M ohm	ELECTRIC CONDUCTION:INSIDE 1.5kohm
CONNECTOR: USB B MALE	SHELL PLATING WITH NICKEL
PIN PLATING: GOLD FLASH,	INSULATOR COLOR:WHITE
CONNECTOR: USB A MALE	SHELL PLATING WITH NICKEL
PIN PLATING: GOLD FLASH,	INSULATOR COLOR:WHITE
CABLE:USB(2.0)	28AWG*1P+28AWG*2C OD=4.2±0.15mm

<b>Lex Tec Inc.</b> 160 Don Park Rd. Unit 5, Markham, On L3R 1C3 905-475-9979, www.lextec.com	PRODUCT	USB A MALE TO USB B MALE ( 2.0 )	DRAWN
	CUS,NO		CHECKED Jackson L
	DR,NO		APPROVERD Jacky Lin